



## Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

**“जानने का अधिकार, जीने का अधिकार”**

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

**“पुराने को छोड़ नये के तरफ”**

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 7169 (1989): Slotted raised countersunk (oval) head tapping screws (common head style) [PGD 31: Bolts, Nuts and Fasteners Accessories]

**“ज्ञान से एक नये भारत का निर्माण”**

Satyanaaran Gangaram Pitroda

“Invent a New India Using Knowledge”



**“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”**

Bhartṛhari—Nītiśatakam

“Knowledge is such a treasure which cannot be stolen”





BLANK PAGE



PROTECTED BY COPYRIGHT

## *Indian Standard*

SLOTTED RAISED COUNTERSUNK ( OVAL )  
HEAD TAPPING SCREWS ( COMMON HEAD STYLE )

( *First Revision* )

### **भारतीय मानक**

खाँचेदार, उठे हुए शंकुखनत ( अंडाकार )  
हैड वाले टर्पिंग पैच ( सामान्य हैड वाले )

( पहला पुनरीक्षण )

---

First Reprint MAY 1998

UDC 621.993 : 621.882.215.4

© BIS 1990

BUREAU OF INDIAN STANDARDS  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

## *Indian Standard*

# SLOTTED RAISED COUNTERSUNK ( OVAL ) HEAD TAPPING SCREWS ( COMMON HEAD STYLE ) ( First Revision )

### NATIONAL FOREWORD

This Indian Standard ( First Revision ) which is identical with ISO 1483 : 1983 'Slotted raised countersunk ( oval ) head tapping screws ( common head style )', issued by the International Organization for Standardization ( ISO ) was adopted by the Bureau of Indian Standards on 3 March 1989 on the recommendation of the Bolts, Nuts and Fastener Accessories Sectional Committee ( EDC 27 ) and approval of the Mechanical Engineering Division Council.

The original version of this standard IS 7169 : 1974 'Specification for slotted raised countersunk ( oval ) head tapping screws' was based on ISO/R 1483 : 1970 'Slotted raised countersunk ( oval ) head tapping screws' issued by the ISO. The present revision has been made by adoption of the revised ISO standard ( ISO 1483 : 1983 ). The following major changes have been made in this revision:

- Countersunk angle has been changed from 80° to 90°,
- Types AB and B have been re-designated as Types C and F, respectively,
- Screw size numbers have been dispensed with and screw sizes are re-designated by the nominal diameters prefixed with letters 'ST'. The following table gives old screw size numbers with the corresponding new size designations:

<i>Screw Size No. as per IS 7169 : 1974.</i>	<i>Corresponding Sizes in This Revision</i>	<i>Screw Size No. as per IS 7169 : 1974</i>	<i>Corresponding Sizes in This Revision</i>
(0)	Not covered	8	ST 4.2
(1)	Not covered	10	ST 4.8
2	ST 2.2	(12)	ST 5.5
(3)	Not covered	14	ST 6.3
4	ST 2.9	(16)	ST 8
(5)	Not covered	Not covered	ST 9.5
6	ST 3.5		
(7)	Not covered		

- Dimensions have been rationalized.

Additional requirements supplementing specifications covered in ISO 1482 : 1983 have been given in the National Annex.

In the adopted standard, certain terminology and conventions are not identical with those used in Indian Standards; attention is specially drawn to the following:

- Wherever the words 'International Standard' appear, referring to this standard, they should be read as 'Indian Standard'; and
- Comma ( , ) has been used as a decimal marker while in Indian Standards the current practice is to use point ( . ) as the decimal marker.

## CROSS REFERENCES

<i>International Standard</i>	<i>Indian Standard</i>	<i>Degree of Correspondence</i>
ISO 225 : 1983 Fasteners — Bolts, screws, studs and nuts — Symbols and designation of dimensions	IS 8536 : 1987 Fasteners — Bolts, screws, studs and nuts — Symbols and designation of dimensions ( <i>first revision</i> )	Identical
ISO 1478 : 1983 Tapping screws thread	IS 5957 : 1989 Dimensions of screws for thread forming tapping screws ( <i>first revision</i> )	Identical
ISO 2702 : 1974 Heat-treated steel tapping screws — Mechanical properties	IS 7178 : 1989† Technical supply conditions for tapping screws ( <i>second revision</i> )	Related
ISO 3269 : 1988* Festeners — Acceptance inspection	IS 2614 : 1969† Methods for sampling of fasteners ( <i>first revision</i> )	Related
ISO 4042‡ Threaded components — Electroplated coating components	IS 1367 (Part 11)‡ Technical supply conditions for threaded fasteners: Part 11 Electroplated coatings	To be identical
ISO 4759/1 : 1978 Tolerances for fasteners, Part 1 Bolts screws and nuts with thread diameters $\geq 1.6$ and $\leq 150$ mm and product grades A, B and C	IS 1367 (Part 2) : 1984 Technical supply conditions for threaded steel fasteners: Part 2 Product grades and tolerances ( <i>second revision</i> )	Technically equivalent
ISO 7721 : 1983 Countersunk head screws — Head configuration and gauging	IS 11362 : 1985 Head configuration and gauging of countersunk head screws	Identical

## ALTERATION

In *Clause 5* the designation of slotted raised countersunk (oval) head tapping screw may be read as:

'Tapping screw IS 7169 — ISO 1483 — ST 3·5 × 16-C'  
in place of 'Tapping screw ISO 1483 — ST 3·5 × 16-C'.

\*Was in draft stage in 1983, first edition published in 1984 and second edition in 1988.

†Provisions of this Indian Standard are applicable..

‡At present in draft stage.

## 1 Scope and field of application

This International Standard specifies the characteristics of slotted raised countersunk (oval) head tapping screws with thread sizes from ST 2,2 to ST 9,5 inclusive.

## 2 References

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and designations of dimensions*

ISO 1478, *Tapping screws thread.*

ISO 2702, *Heat-treated steel tapping screws — Mechanical properties.*

ISO 3269, *Fasteners — Acceptance inspection.*<sup>1)</sup>

ISO 4042, *Threaded components — Electroplated coatings components.*<sup>1)</sup>


ISO 4759/1, *Tolerances for fasteners — Part 1: Bolts, screws and nuts with thread diameters > 1,6 and < 150 mm and product grades A, B and C.*

ISO 7721, *Countersunk head screws — Head configurations and gauging.*


1) At present at the stage of draft.

### 3 Dimensions

Type C

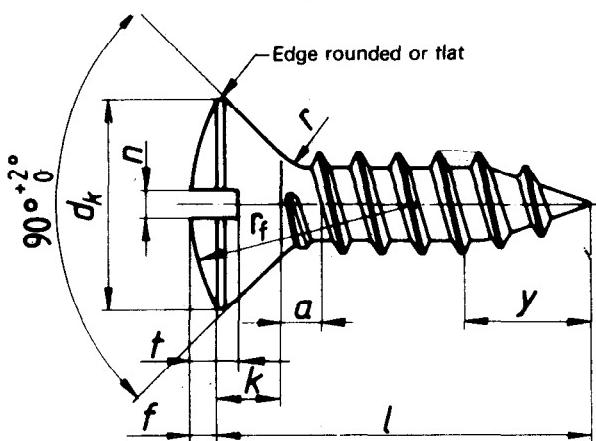

Type F



Dimensions in millimetres

Thread size	ST 2,2	ST 2,9	ST 3,5	ST 4,2	ST 4,8	ST 5,5	ST 6,3	ST 8	ST 9,5
P <sup>1)</sup>	0,8	1,1	1,3	1,4	1,6	1,8	1,8	2,1	2,1
a <sup>2)</sup>	max.	0,8	1,1	1,3	1,4	1,6	1,8	1,8	2,1
d <sub>k</sub>	theoretical <sup>3)</sup>	4,4	6,3	8,2	9,4	10,4	11,5	12,6	17,3
	actual	max.	3,8	5,5	7,3	8,4	9,3	10,3	11,3
		min.	3,5	5,2	6,9	8	8,9	9,9	10,9
f	=	0,5	0,7	0,8	1	1,2	1,3	1,4	2
k	max.	1,1	1,7	2,35	2,6	2,8	3	3,15	4,65
n	nom.	0,5	0,8	1	1,2	1,2	1,6	1,6	2,25
	min.	0,56	0,86	1,06	1,26	1,26	1,66	1,66	2,06
	max.	0,7	1	1,2	1,51	1,51	1,91	1,91	2,31
r	max.	0,8	1,2	1,4	1,6	2	2,2	2,4	3,2
r <sub>f</sub>	=	4	6	8,5	9,5	9,5	11	12	16,5
t	min.	0,8	1,2	1,4	1,6	2	2,2	2,4	3,2
	max.	1	1,45	1,7	1,9	2,4	2,6	2,8	3,7
y ref. <sup>4)</sup>	Type C	2	2,6	3,2	3,7	4,3	5	6	7,5
	Type F	1,6	2,1	2,5	2,8	3,2	3,6	3,6	4,2
<i>(5)</i>									
nom.	Type C		Type F						
	min.	max.	min.	max.					
4,5	3,7	5,3	3,7	4,5	—	—	—	—	—
6,5	5,7	7,3	5,7	6,5	—	—	—	—	—
9,5	8,7	10,3	8,7	9,5	—	—	—	—	—
13	12,2	13,8	12,2	13	—	—	—	—	—
16	15,2	16,8	15,2	16	Range				
19	18,2	19,8	18,2	19	of				
22	21,2	22,8	20,7	22	commercial				
25	24,2	25,8	23,7	25	lengths				
32	30,7	33,3	30,7	32	—	—	—	—	—
38	36,7	39,3	36,7	38	—	—	—	—	—
45	43,7	46,3	43,5	45	—	—	—	—	—
50	48,7	51,3	48,5	50	—	—	—	—	—

1) P = pitch of the thread.

2) Distance from the underside of the head to the first major diameter of the thread within specified limits.

3) See ISO 7721.

4) Length of incomplete thread.

5) Sizes with lengths marked with a dash (—) in the table shall not be manufactured.

#### 4 Specifications and reference International Standards

Material	Steel, according to ISO 2702	
Thread	According to ISO 1478	
Mechanical properties	According to ISO 2702	
Tolerances	Product grade	A
	International Standard	ISO 4759/1
Finish	<p>Plain</p> <p>Requirements for electroplating are covered in ISO 4042.</p> <p>If different electroplating requirements are desired or if requirements are needed for other finishes, they should be negotiated between customer and supplier.</p>	
Acceptability	For acceptance procedure see ISO 3269.	

#### 5 Designation

Example for the designation of a slotted raised countersunk (oval) head tapping screw with thread size ST 3,5, nominal length  $l = 16$  mm and cone end type C.

Tapping screw ISO 1483 - ST 3,5 × 16 - C

## **NATIONAL ANNEX**

In addition to the requirements covered in the standard, the self tapping screws manufactured to IS 7169 : 1989 shall also comply with the following.

### **A-1 GENERAL REQUIREMENTS**

In respect of the other requirements not covered in this standard, the tapping screws shall conform to IS 7178 : 1989.

## Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

### Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

### Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards: Monthly Additions'.

This Indian Standard has been developed from Doc : No. EDC 27 ( 4121 )

### Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

### BUREAU OF INDIAN STANDARDS

#### Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002  
Telephones : 323 01 31, 323 33 75, 323 94 02

Telegrams : Manaksanstha  
(Common to all offices)

#### Regional Offices :

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg  
NEW DELHI 110 002

Telephone

{ 323 76 17  
  323 38 41

Eastern : 1/14 C. I.T. Scheme VII M, V. I. P. Road, Maniktola  
CALCUTTA 700 054

{ 337 84 99, 337 85 61  
  337 86 26, 337 91 20

Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160 022

{ 60 38 43  
  60 20 25

Southern : C. I. T. Campus, IV Cross Road, CHENNAI 600 113

{ 235 02 16, 235 04 42  
  235 15 19, 235 23 15

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)  
MUMBAI 400 093

{ 832 92 95, 832 78 58  
  832 78 91, 832 78 92

Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE.  
FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR.  
LUCKNOW. NAGPUR. PATNA. PUNE. THIRUVANANTHAPURAM.